

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 4 TWN. 16_N RNG. 5_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 5-15-09
Party Chief: Greene
Crew: Taylor
Type of Marker: Survey mark nail over brass plug in steel box
Method of Establishment: County: 7-12-1999
IN S.P.C. E Zone, NAD 83
Name: 16050404
N: 512 363.317 2(m)
E: 72 191.105 2(m)

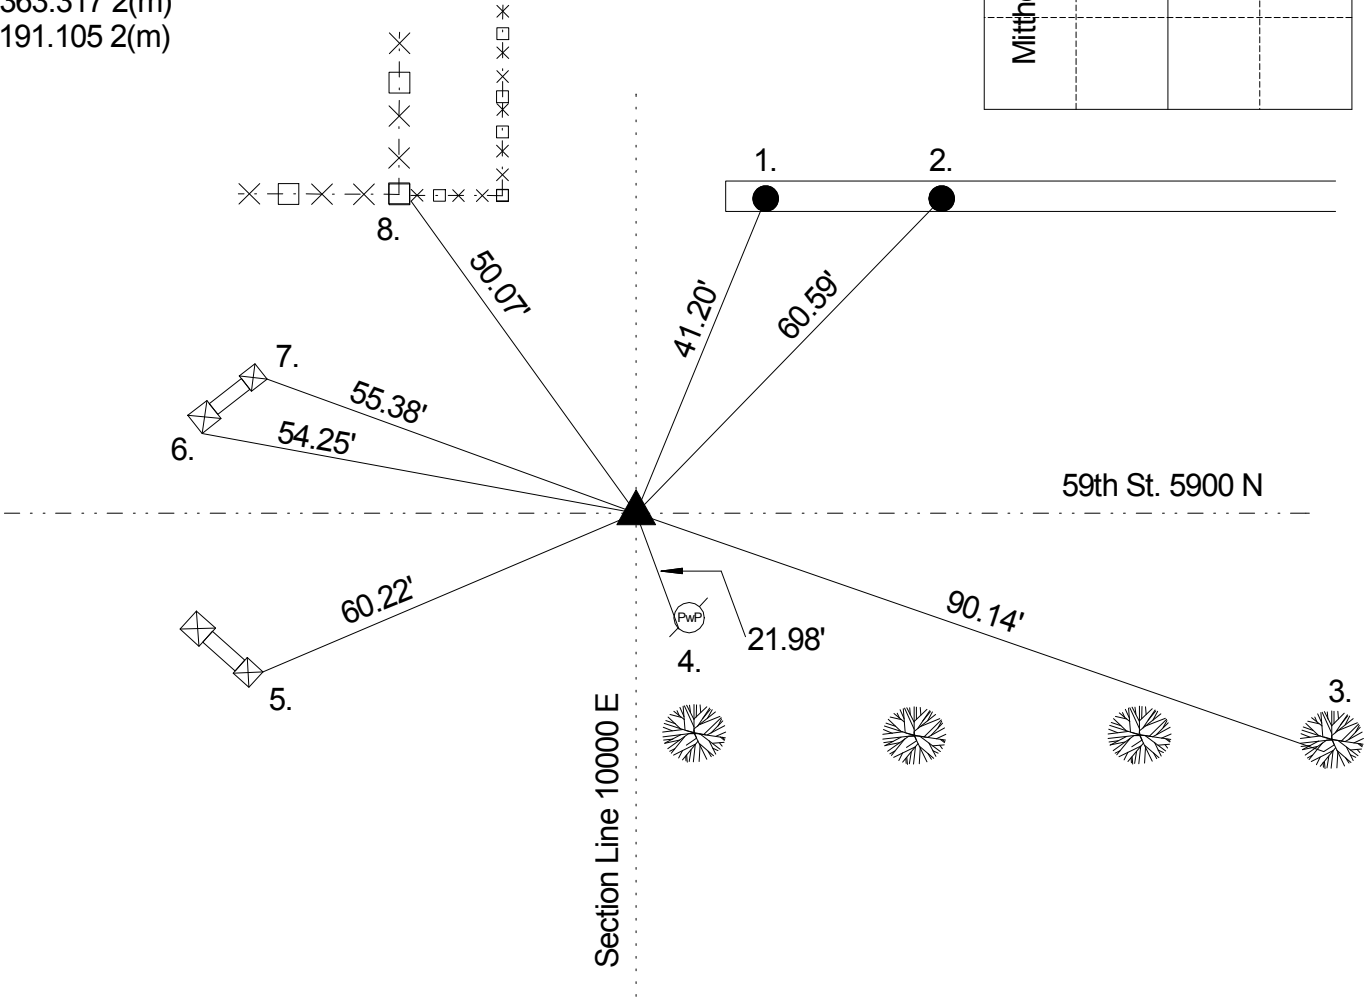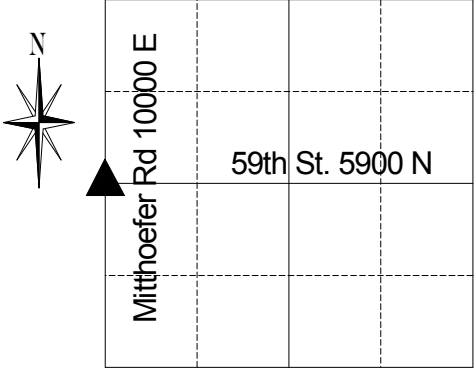

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 18" beech bearing N 74 W 22 links and a 12" dogwood bearing S 87 E 30 links. (Marion County Atlas p. 15) A survey by O.W. Voorhies on February 1, 1871 indicates no stone or witnesses. (Lawrence Legal Book p. 45) Corner referenced by Fortner on 3/14/1975 and called a 1" iron pin 4" down. Corner referenced by IPL on 11/30/81 and called a brass plug set in concrete. Corner referenced by Kiste on 10/4/94 and called a copperweld in steel box. Corner referenced by Kiste on 7/12/1999 and called a copperweld in steel box. Corner referenced by Wilcoxon on 7/7/2004 and called a survey marker nail over brass plug in steel box. Corner referenced by Greene on 5/15/09 and called a brass plug in steel box.

REF.	DISTANCE	DESCRIPTION
1.	41.20'	Mag nail w/brass washer in asphalt walk area
2.	60.59'	Mag nail w/brass washer in asphalt walk area
3.	90.14'	Mag nail w/brass washer SW 6" sweet gum 5" up
4.	21.98'	Mag nail w/brass washer SW PwP #601-351 C 4" up
5.	60.22'	Corner of stone sign
6.	54.25'	Corner of stone sign
7.	55.38'	Corner of stone sign
8.	50.07'	Face of steel fence post (tennis court fencing)